GBCV Gauge Vacuum – 30PSI Boost Gauge TS-0101-2023




IMPORTANT NOTES:

Please thoroughly read and understand these instructions before commencing this installation.

RECOMMENDATIONS

- Turbosmart recommends that your Gauge is fitted and adjusted by an appropriately qualified technician
- GBCV Gauge mount cup (TS-0101-2024) Sold separately

HOW TO INSTALL YOUR BOOST GAUGE

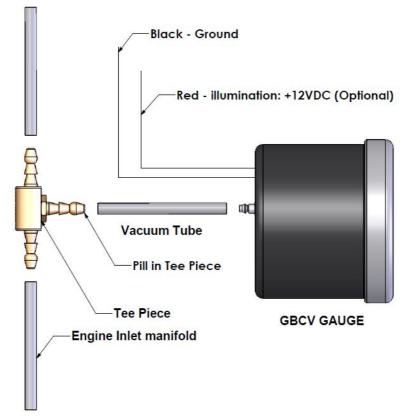

- Connect the Red wire to the +12VDC illumination wire of the headlights or stereo
- Connect the black wire to a suitable ground on the chassis
- Find a suitable vacuum source on the inlet manifold of the engine, e.g. pressure source to the fuel pressure regulator
- Install the supplied tee piece in between the pressure source line, <u>make sure that the pill in the tee</u> piece is towards the Gauge
- Connect the tee piece to the Gauge with the supplied vacuum tube
- Start engine and check for leaks and illumination

