


## KOMPACT SUPERSONIC BLOW-OFF VALVE INSTRUCTIONS

### IMPORTANT NOTES ON FITTING YOUR KOMPACT SS

Turbosmart recommends that your BOV is fitted by an appropriately qualified technician.

## IMPORTANT!

**Please note the orientation when fitting your Kompact SS BOV.**

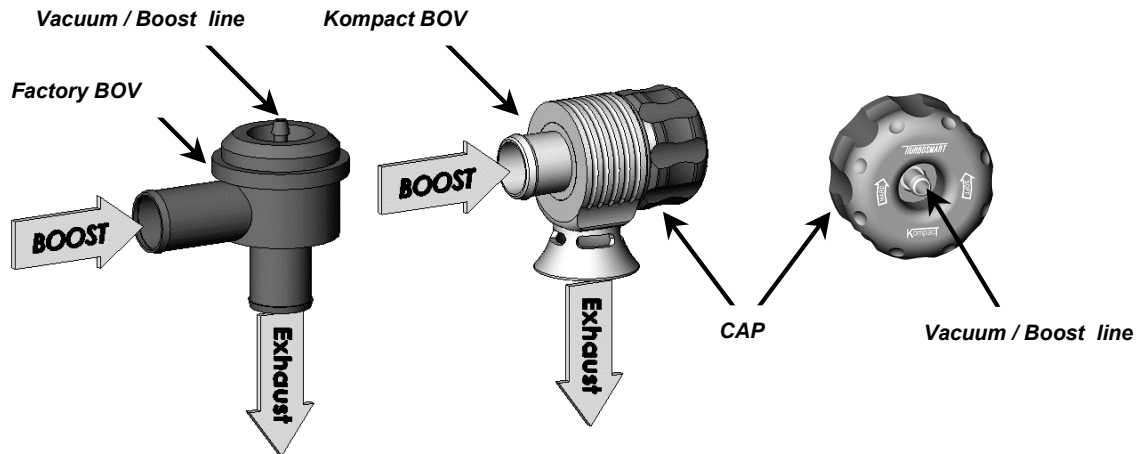

**Figure 1** Orientation of Kompact SS BOV

### KOMPACT KIT CONTENTS

Please check that the following items have been provided in your Kompact Kit.

Quantity	Description	Use
1	Kompact BOV	Main component
1	6.3mm-5mm Reducer	Connects 5mm ID Silicon hose with factory vacuum hose
2	20-32mm Hose Clamp	To secure the boost hose to the Kompact BOV and the blanking plug to the exhaust hose
100mm	5mm ID Silicon hose	Connects either 3-5mm reducer or 6mm-5mm reducer to Kompact nipple
1	25mm Turbosmart Blanking Plug	Blanks off the factory exhaust hose

### IMPORTANT NOTES ON FITTING YOUR KOMPACT SS BOV

Want more information fitting your Kompact SS BOV? Check the Turbosmart web-site [www.turbosmart.com.au](http://www.turbosmart.com.au) for a complete listing of model specific fitting instructions. Turbosmart recommends that your BOV is fitted by an appropriately qualified technician. See the following steps for details on the fitting procedure.

- Remove the engine cover, common to most European vehicles.
- Locate the factory BOV. Undo the hose clamps holding the factory BOV to the factory boost and exhaust hoses.
- Remove the factory BOV **noting the positions of the boost hose and the exhaust hose**. You will have to fit the Kompact SS BOV with reference to the boost hose and blank off the exhaust hose. (see fig. 1). For more information on fitting, see the Turbosmart website.
- Remove the vacuum/boost line from the Factory BOV nipple.
- The Kompact SS BOV will be mounted in the space where the factory BOV was sitting. Ensure that the mounting position will not be effected by the engine moving when under load.
- The Kompact SS BOV must be mounted in a position so that it is sheltered from any contamination, i.e. away from where it could be splashed or the direct path of any air borne debris.
- Ensure that the factory hoses on which the Kompact SS BOV will be fitted to are in a good condition, not worn and without any tearing.
- Connect the factory boost hose onto the Kompact SS BOV (As shown on Fig. 1).
- Tighten the hose clamp supplied on the factory boost hose to secure the Kompact SS BOV.
- Blank off the factory exhaust hose with the supplied Turbosmart blanking plug.
- Tighten the hose clamp supplied on the factory exhaust hose to secure the Turbosmart blanking plug.
- Connect the factory vacuum/boost line onto the Kompact BOV nipple. If the factory vacuum/boost line does not fit, connect the appropriate reducer & 5mm vacuum hose. Push the exposed end of the reducer into the factory vacuum/boost line and connect the 5mm vacuum hose onto the Kompact nipple.
- The supplied 5mm silicon vacuum hose is of good quality – inferior hoses can be affected by heat and could eventually crack, split or collapse. This would cause the Kompact SS BOV to leak and may cause poor fuel economy and lead to serious engine damage.
- Minimise the length of the vacuum hose where possible – the longer the hose, the slower the Kompact SS BOV will respond, this may have a dramatic effect on the performance of the Kompact SS BOV.

## KOMPACT SUPERSONIC BLOW-OFF VALVE INSTRUCTIONS

### IMPORTANT NOTES ON SETTING THE SPRING TENSION

- Adjustment to the KOMPACT SS BOV is made by rotating the cap (see figure 2), to increase spring tension rotate in the direction of hard, marked on the top of the cap.
- Rotate the cap in the direction of soft to decrease the spring tension – **CAUTION** Do not rotate the cap beyond the indicator groove (see figure 3).
- With the engine at idle the exhaust port should be closed off by the piston – the piston should be hard against the seat and not floating or moving.
- Free rev the engine and back off quickly, the engine should return to normal idle speed – if the engine drops below idle or stalls increase the spring tension by half a turn.
- Repeat this process until the engine free revs and returns to normal idle speed.
- Tests drive the car and ensure that when decelerating or changing gears that the engine does not backfire or stall. If backfiring or stalling is noticed then check all connections made during the installation, otherwise increase the spring tension.




**Figure 2** Top View of Cap showing Hard, Soft adjustments

### MAINTAINING YOUR KOMPACT SS BOV

Turbosmart recommends that the following maintenance procedure is carried out at half-year intervals. Regular maintenance will ensure that your KOMPACT SS BOV is operating at its peak and will extend the working life of the product.

- Remove the cap of the KOMPACT SS BOV by rotating in an anti-clockwise direction (see figure 2) – **CAUTION** The cap is under spring tension, wear safety glasses and remove with care!
- Remove the spring and measure the free length or the overall length of the spring. Replace the spring if its free length is less than **64mm**.
- Remove the piston, thoroughly clean the piston and the bore of the KOMPACT SS BOV.
- Inspect the surface of the piston and the bore of the KOMPACT SS BOV for scoring or excessive wear, silver coloured marks are an indication of excessive wear.
- Check the Cap O-ring for any damage – replace if necessary.
- Lubricate the bore and the piston with Turbosmart lubricant (see figure 3) – **DO NOT** use grease or viscous oils.
- Re-assemble the KOMPACT SS BOV in the reverse order.

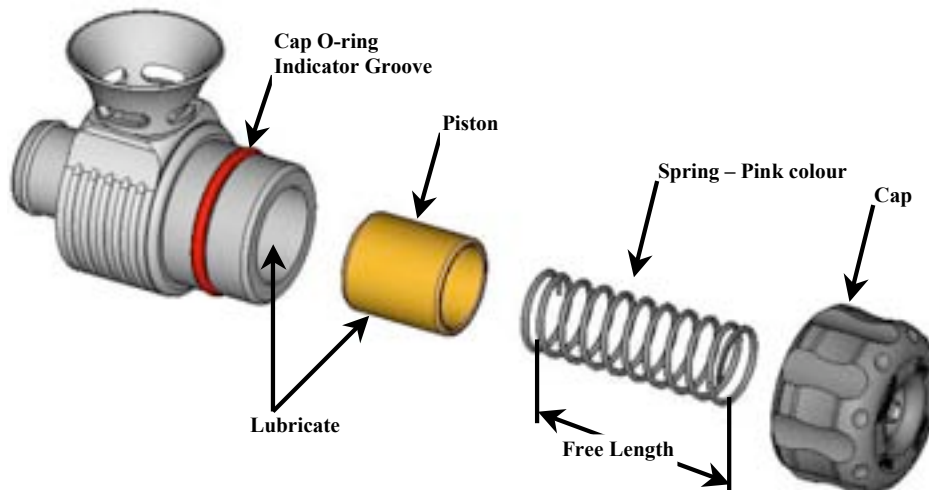

**Figure 3** Exploded View of the Kompact SS BOV

### TROUBLE SHOOTING

The following points should be checked if you find that your engine is dipping below normal idle, stalling or if the KOMPACT SS BOV is functioning poorly. Please note, the following checks will cure 99% of problems experienced with a KOMPACT SS BOV.

- Check the vacuum hose for splits, cracks, loose connection, kinking or any obstruction – old or fatigued hose may collapse under vacuum causing an obstruction.
- With the engine running remove the vacuum / boost line from the nipple in the cap of the KOMPACT SS BOV, there should be a loud hissing sound. The engine should idle poorly, double check by covering the end of the hose with your finger – otherwise the hose is blocked.
- Check to see if the KOMPACT SS BOV is blocked or contaminated with dirt or debris, if the valve appears to be contaminated follow the maintenance directions above.
- Ensure that the vacuum / pressure source is not shared and that the vacuum source is directly from the inlet manifold.
- Ensure that the exhaust hose is blanked off.
- Check the seal between the boost hose and the KOMPACT SS BOV – ensure the hose clamps are tightened.



PART NUMBER  
FG-BOV-KTSS25

## KOMPACT SUPERSONIC BLOW-OFF VALVE INSTRUCTIONS

### TURBOSMART ONE YEAR LIMITED WARRANTY

Turbosmart is a company built on Customer Satisfaction and Service. That is why all of our products go through regimented test procedures before they are packaged and shipped. Turbosmart stands behind its products for one full year after purchase. Terms of Warranty, Service and Returns are as follows:

**Limited Warranty:** Turbosmart warrants its products to be free from defects in material and workmanship under normal use and if properly installed for a period of one year from date of purchase. If found to be defective, it will be replaced or repaired if returned prepaid along with proof of date of purchase. This shall constitute the sole remedy of the purchaser and the sole liability of Turbosmart to the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representations whether expressed or implied, including any implied warranty of merchantability or fitness. In no event shall Turbosmart be liable for special or consequential damages. This warranty is only valid on products purchased from Turbosmart Authorized Dealers.

**Service:** After the warranty period has expired, repair service is charged based on a minimum and maximum charge rate. (Contact Customer Service for current rate).

**Returns:** When returning a Turbosmart product for repair, it must be accompanied by a completed Customer Warranty Form and RMA number. To access this form please go to our website [www.turbosmartonline.com](http://www.turbosmartonline.com) and you will find it on the Downloads page.

### THE TURBOSMART PLEDGE

DO NOT USE ANY TURBOSMART PRODUCT UNTIL YOU HAVE CAREFULLY READ AND UNDERSTOOD THE FOLLOWING AGREEMENT.

Please call if you have any questions or do not understand this agreement. Refer to our brochure, website or catalogue for terms and conditions and further information regarding your product. Turbosmart appreciates your business and pride ourselves on our customer service. We are always happy to offer you advice and will provide you with help in any way we can. The purpose of this agreement is to avoid any problems or hard feelings.

We sometimes make mistakes, as do our dealers, distributors and suppliers. Even customers can sometimes order the wrong parts. Do not use, modify, install, trial assemble, nick, drop, scratch or adjust any part until you first check for any damage. Damage must be reported immediately. NO EXCEPTIONS. If there are any components missing please contact your authorized reseller immediately upon receipt of your shipment. Missing components must be reported within five (5) business days of receipt. Parts returned for any reason MUST BE IN RESALABLE CONDITION. It is YOUR responsibility, "THE CUSTOMER" to carefully package any returns to avoid shipping damage. Insurance is highly recommended. Credit cannot be issued for damaged goods.

Turbosmart warrants the quality of the products it designs and manufactures to be free of defects in material and workmanship. This limited warranty is extended only to the original purchaser and may not be transferred or assigned. This limited warranty applies to any product, which after careful inspection by Turbosmart, after receipt of the product from our authorized reseller, is found to have a defect in either material or workmanship. Any modifications to the product will void any and all warranties and will not be exchanged. Before installation, check new car warranty. Turbosmart is not responsible for voiding any original manufactures warranty.

All warranty claims must be returned to the nearest Turbosmart Office, you must return the product and sales receipt, at your own expense, accompanied by the Customer Warranty Form stating the reason for the claim. Proof of purchase must be provided with any warranty claim and will be verified with the authorized reseller from which the product was purchased.

If all the above procedures are followed, and the product is found to be defective in either workmanship or material, Turbosmart shall either repair or replace the product, at its sole discretion, and sole cost. This limited warranty does not cover or apply to any personal injury, labor charges or any other incidental costs or damages caused by the defective product. The individual purchaser acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the individual purchaser agrees to indemnify Turbosmart and to hold Turbosmart harmless for any claim related to the item of the equipment purchased. Under no circumstances will Turbosmart be liable for any damages or expenses by reason of use or sale of any such equipment.

THIS LIMITED WARRANTY IS THE ONLY EXPRESS WARRANTY, WHICH APPLIES TO TURBOSMART PRODUCT AS EXPRESSLY GIVEN IN LIEU OF ANY OTHER WARRANTY EXPRESSED OR IMPLIED, INCLUDING THAT OF MERCHANTABILITY. ANY IMPLIED WARRANTY INCLUDING THAT OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE IS HEREBY LIMITED BY THE SAME TERMS AND TIME LIMITATIONS SET FORTH IN THIS LIMITED EXPRESS WARRANTY AND OTHERWISE EXCLUDED. EXCEPT FOR THOSE OBLIGATIONS ASSUMED HEREIN, TURBOSMART ASSUMES NO OTHER OBLIGATIONS IN CONNECTION WITH THE SALE OF ITS PRODUCTS.

IN THE EVENT THAT THE INDIVIDUAL PURCHASER DOES NOT AGREE WITH THIS AGREEMENT THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UN-USED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN SEVEN (7) DAYS FROM THE DATE OF PURCHASE FOR A FULL REFUND. THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE INDIVIDUAL PURCHASER HAS READ AND UNDERSTOOD THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

**Happy motoring!  
The Turbosmart Team.**